



KONICA MINOLTA

Display Color Analyzer CA-410

CIE 170-2:2015 Compliant Probe

1

CA-P427C/P410C




CA-P427C



CA-P410C

CIE 170-2: 2015 is a chromaticity diagram with physiological axes defined by CIE and announced in 2015. This probe has color-matching functions conforming to the CIE 170-2: 2015 definition, and provides luminance and chromaticity data that have high correlation with visual results even when adjusting wide color gamut displays.

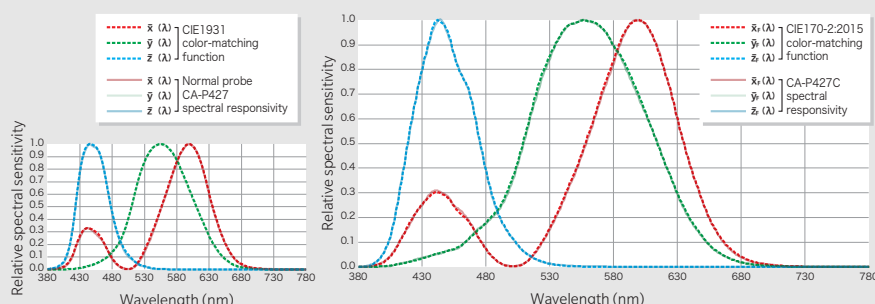

Model			CA-P427C	CA-P410C
Measurement area			Φ 27 mm	Φ 10 mm
Acceptance angle			± 2.5°	± 5°
Accuracy guaranteed measurement distance			30 ± 10 mm	30 ± 5 mm
Display range			Luminance 0.0001 to 5,000 cd/m ² Chromaticity Displayed in 4 digits Accuracy guaranteed range 0.001 to 5,000 cd/m ²	Luminance 0.0001 to 5,000 cd/m ² Chromaticity Displayed in 4 digits Accuracy guaranteed range 0.01 to 5,000 cd/m ²
Luminance	Accuracy (for white) ^{*1,*3}	> 0.001 cd/m ²	± 9 %	---
		> 0.01 cd/m ²	± 2 %	± 2.5 %
		> 0.1 cd/m ²	± 1.5 %	± 2 %
		> 1 cd/m ²	± 1.5 %	± 2 %
		> 10 cd/m ²	± 1.5 %	± 1.5 %
	Repeatability (2σ) ^{*1}	> 0.001 cd/m ²	10 %	---
		> 0.01 cd/m ²	1 %	2 %
		> 0.1 cd/m ²	0.40 %	0.60 %
		> 1 cd/m ²	0.10 %	0.20 %
		> 10 cd/m ²	0.10 %	0.10 %
Chromaticity	Accuracy guaranteed luminance range		0.01 to 5,000 cd/m ²	0.01 to 5,000 cd/m ²
	Accuracy (for white) ^{*1,*3}	> 0.01 cd/m ²	± 0.003	± 0.006
		> 0.1 cd/m ²	± 0.002	± 0.002
		> 1 cd/m ²	± 0.002	± 0.002
		> 10 cd/m ²	± 0.002	± 0.002
		> 100 cd/m ²	± 0.002	± 0.002
	Repeatability (2σ) ^{*1}	At 100 cd/m ² (for monochrome)	100 cd/m ²	± 0.003
		> 0.01 cd/m ²	0.0035	0.0070
		> 0.1 cd/m ²	0.0015	0.0020
		> 1 cd/m ²	0.0004	0.0008
		> 10 cd/m ²	0.0003	0.0005
Flicker (Contrast)	Measurement luminance range		5 to 1,500 cd/m ²	15 to 3,000 cd/m ²
	Measurement target (Flicker frequency)		0.25 to 65 Hz	0.25 to 65 Hz
	Accuracy	30 Hz, AC/DC 10% sine wave	± 0.4 %	± 0.4 %
		60 Hz, AC/DC 10% sine wave	± 0.7 %	± 0.7 %
	Repeatability (2σ)	20-65 Hz, AC/DC 10% sine wave	0.3 %	0.3 %

Flicker (JEITA)	Measurement luminance range		5 to 1,500 cd/m ²	15 to 3,000 cd/m ²
	Measurement target (Flicker frequency)		0.42 to 65 Hz	0.42 to 65 Hz
	Accuracy	30 Hz, AC/DC 4% sine wave	± 0.35dB	± 0.35dB
		30 Hz, AC/DC 1.2% sine wave	± 0.35dB	± 0.35dB
	Repeatability (2σ)	30 Hz, AC/DC 4% sine wave	0.1dB	0.1dB
30 Hz, AC/DC 1.2% sine wave		0.3dB	0.3dB	
Accuracy guaranteed measurement speed ^{*4}	Lvxy	AUTO	1 time/sec (>0.001 cd/m ²)	1 time/sec (>0.01 cd/m ²)
			5 times/sec (>0.15 cd/m ²)	5 times/sec (>0.15 cd/m ²)
	Flicker (Contrast)		20 times/sec (> 2 cd/m ²)	20 times/sec (> 2 cd/m ²)
			20 times/sec	20 times/sec
		Flicker (JEITA)	0.5 times/sec (at 1HzPitch), 2.5 times/sec (at 10HzPitch)	0.5 times/sec (at 1HzPitch), 2.5 times/sec (at 10HzPitch)
Measurement synchronization mode			NTSC, PAL, EXT, UNIV, INT, MANU (4ms to 4s) INT, MANU (4ms to 4s)	NTSC, PAL, EXT, UNIV, INT, MANU (4ms to 4s) INT, MANU (4ms to 4s)
Measurement speed mode			AUTO, LTD, AUTO, SLOW, FAST	AUTO, LTD, AUTO, SLOW, FAST
Measurement target (Vertical synchronization frequency)			0.5 to 240 Hz (luminance and chromaticity) 0.5 to 130 Hz (flicker)	0.5 to 240 Hz (luminance and chromaticity) 0.5 to 130 Hz (flicker)
User calibration memory channel			99 channels	99 channels
Interface	Communication		USB2.0, RS-232C	USB2.0, RS-232C
	Trigger		In & Out [5V]	In & Out [5V]
Size (mm)			42 x 42 x 139.7	42 x 42 x 173.5
Weight			270 g (including mount)	280 g (including mount)
Power supply			DC 5 V (input from USB bus power line or RS communication connector)	
Operation temperature/humidity range ^{*5}			10 to 35°C, relative humidity 85% or less with no condensation	
Storage temperature/humidity range			0 to 45°C, relative humidity 85% or less (at 35°C) with no condensation	
Accessories	Standard	PC Software for Color Analyzer Ver. 1.0 CA-S40 ^{*6} , SDK for Color Analyzer CA-SDK2, USB Cable for Probe-PC (2 m) IF-A28, Hood for Probe, Lens Cap for Probe		
	Optional	Conversion Cable IF-A29, BNC Conversion Cable IF-A35		

*1: Measured under Konica Minolta's standard light source (6,500K).

*2: Luminance for monochrome is measured when reading of luminance for white is 100 cd/m².

*3: Temperature 23°C/±2°C, relative humidity 40%±10%


*4: In NTSC synchronization mode using USB with one probe

*5: Reading fluctuation (compared to reference reading at 23°C, 40% RH): Luminance: ±2% for white; Chromaticity (at 100 cd/m²): ±0.002 for white, ±0.003 for monochrome

*6: The probe corresponding to CIE 170-2: 2015 can not be used under Ver. 1.30 or earlier.


Merits of using a CIE 170-2:2015-compliant probe

When adjusting color of conventional displays using our color analyzer probe conforming to CIE 1931

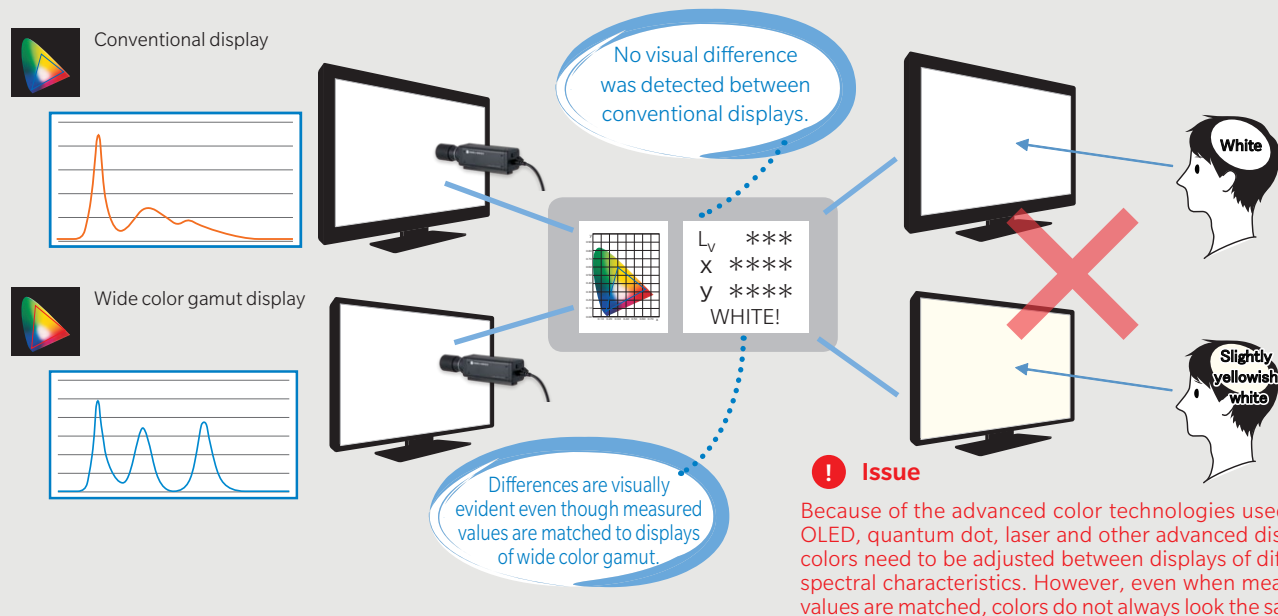


Improvements made using CIE 170-2:2015

When adjusting color of wide color gamut displays using our CIE 170-2:2015-complaint probe

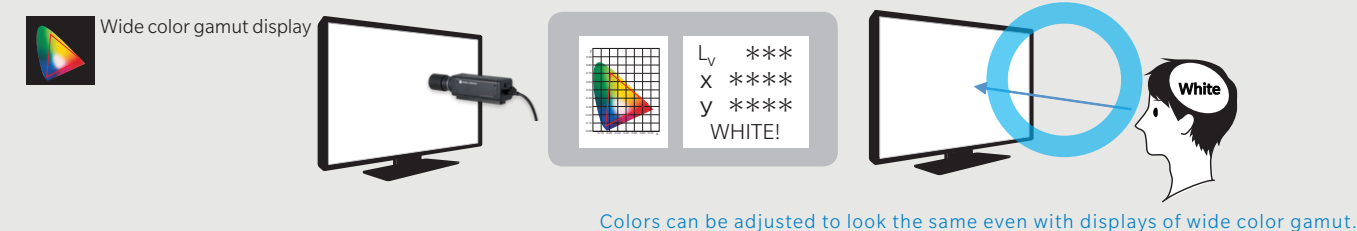


Dimensions (Units : mm)

CA-P427C



CA-P410C



- KONICA MINOLTA, the Konica Minolta logo and symbol mark, and "Giving Shape to ideas" are registered trademarks or trademarks of KONICA MINOLTA, INC.
- Screens shown are for illustration purpose only.
- The specifications and appearance shown herein are subject to change without notice.
- Some lighting control methods may make accurate measurements difficult. For details, please contact your nearest Konica Minolta sales office or dealer.



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.



Certificate No : JQA-E-80027
Registration Date : March 12, 1997

KONICA MINOLTA, INC.
Konica Minolta Sensing Americas, Inc.
Konica Minolta Sensing Europe B.V.

Osaka, Japan
New Jersey, U.S.A.
European Headquarter /BENELUX
German Office
French Office
UK Office
Italian Office
Swiss Office
Nordic Office
Polish Office
Turkish Office
SE Sales Division
Beijing Office
Guangzhou Office
Chongqing Office
Qingdao Office
Wuhan Office

Phone : 888-473-2656 (in USA), 201-236-4300 (outside USA)
Nieuwegein, Netherlands
München, Germany
Roissy CDG, France
Warrington, United Kingdom
Cinisello Balsamo, Italy
Dietikon, Switzerland
Västra Frölunda, Sweden
Wrocław, Poland
Istanbul, Turkey
Shanghai, China
Beijing, China
Guangdong, China
Chongqing, China
Shandong, China
Hubei, China
Singapore
Goyang-si, Korea

Fax : 201-785-2482
Fax : +31 (0) 30 24 81 211
Fax : +49 (0) 89 4357 156 99
Fax : +33 (0) 1 80 11 10 82
Fax : +44 (0) 1925 711143
Fax : +39 02849488.30
Fax : +41 (0) 43 322-9809
Fax : +48 (0) 71 734 52 10
Fax : +90 (0) 212-253 49 69
Fax : +86- (0)21-5489 0005
Fax : +86- (0)10-8522 1241
Fax : +86- (0)20-3826 4223
Fax : +86- (0)23-6773 4799
Fax : +86- (0)532-8079 1873
Fax : +86- (0)27-8544 9991
Fax : +65 6560-9721
Fax : +82 (0) 31-995-6511

Konica Minolta (CHINA) Investment Ltd.

Konica Minolta Sensing Singapore Pte Ltd.
Konica Minolta Sensing Korea Co., Ltd.

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page :

<https://konicaminolta.com/instruments/network>