


Display Color Analyzer CA-410

Small Spot Probes

Long Working Distance Probe



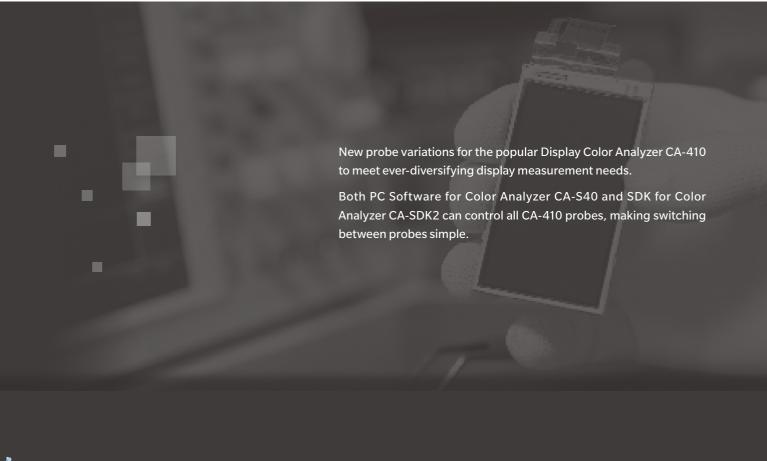



Ø2 mm Small Spot Probe CA-VP402

- A probe with a measuring area diameter of approximately Ø2 mm. The dedicated optical system and operation algorithm provides both guaranteed accuracy at ultra-low luminance and small measurement area. Suitable for applications requiring small-area measurements ranging from low-luminance measurements, such as for gamma adjustment of micro OLEDs, to high-speed, high-accuracy measurements.
- * Since an imaging optical systme is used, when measuring devices with large pixel pitch interference between the sensor fiber and the display pixels may adversely affect measurement repeatability.
- * Zero calibration time and low-luminance integration time is longer than conventional CA-410 probes.



Measurement area: Ø2.1 mm Acceptance angle: $\pm 10^{\circ}$

Accuracy guaranteed measurement distance: 28 mm ± 2 mm

Accuracy guaranteed measurement luminance range (Luminance measurements): 0.002 to 6,000 cd/m²
(Chromaticity measurements): 0.02 to 6,000 cd/m²



Micro OLFD



Smartwatch

Ø4 mm Small Spot Probe CA-VP404

A probe with a measuring area diameter of Ø4 mm. Guaranteed accuracy from $0.004\,\text{cd/m}^2$ enables high-speed, high-accuracy measurements of small areas such as smartwatch OLEDs, smartphone edges, small APL (average pixel level) windows, etc.

Main specifications

Measurement area: Ø4 mm Acceptance angle: ±8.5°

Accuracy guaranteed measurement distance: 30 mm \pm 2 mm Accuracy guaranteed measurement luminance range

(Luminance measurements) : 0.004 to 12,000 cd/m² (Chromaticity measurements) : 0.04 to 12,000 cd/m²

Ø10 mm LWD (200 mm) Probe CA-VP410T

A long-working-distance model with a measurement distance of 200 mm. The optical system is not easily affected by display directionality, making it suitable for multi-angle measurement of in-vehicle displays or smartphone OLEDs, or evaluation of the angular characteristics of curved displays. In addition, the long working distance allows it to be used in applications where it is necessary to have some distance from the measurement subject, such as for avoiding collisions with the measurement subject on automatic measurement systems.

Main specifications

Measurement area: Ø10 mm Acceptance angle: ±4°

Accuracy guaranteed measurement distance: 200 mm ± 2 mm

Accuracy guaranteed measurement luminance range

 $\begin{array}{ll} \text{(Luminance measurements)} &: 0.004 \, \text{to} \, 12,\!000 \, \text{cd/m}^2 \\ \text{(Chromaticity measurements)} &: 0.04 \, \text{to} \, 12,\!000 \, \text{cd/m}^2 \end{array}$



In-vehicle display



Smartphone OLED

*Refer to the Main specifications for detailed specifications of each probe.

ISO Certifications of KONICA MINOLTA, Inc., Sakai Site

 $https://www.konicaminolta.com/instruments/download/catalog/display/pdf/ca-410_probe_catalog_eng.pdf$



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

 Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.

KONICA MINOLTA, INC. Konica Minolta Sensing Americas, Inc. Konica Minolta Sensing Europe B.V. Osaka, Japan
New Jersey, U.S.A.
European Headquarter /BENELUX
German Office
French Office
UK Office
Italian Office
Swiss Office
Nordic Office
Polish Office

Konica Minolta (CHINA) Investment Ltd.

Italian Office
Swiss Office
Nordic Office
Polish Office
Turkish Office
SE Sales Division
Beijing Office
Guangzhou Office
Chongqing Office
Qingdao Office
Wuhan Office

Konica Minolta Sensing Singapore Pte Ltd. Konica Minolta Sensing Korea Co., Ltd. Design, development, manufacture/manufacturis general general

Phone: +31(0)30 248-1193 München, Germany Phone: +49(0)89 4357 156 0 Roissy CDG, France Phone: +33(0) 1 80 11 10 70 Warrington, United Kingdom Phone: +44(0)1925 467300 Cinisello Balsamo, Italy Phone: +39 02849488.00 Dietikon, Switzerland Phone: +41(0)43 322-9800 Phone: +46(0)31 7099464 Phone: +48(0)71 73452-11 Västra Frölunda, Sweden Wroclaw, Poland Istanbul, Turkey **Phone :** +90 (0) 216-528 56 56 Shanghai, China Phone: +86-(0)21-5489 0202 Beijing, China Phone: +86-(0)10-8522 1551 Guangdong, China Phone: +86-(0)20-3826 4220 Phone: +86-(0)23-6773 4988 Chongqing, China Shandong, China Phone: +86-(0)532-8079 1871 Hubei, China Phone: +86-(0)27-8544 9942 Singapore Phone: +65 6563-5533 Phone: +82(0)2-523-9726 Govang-si, Korea

Fax: 201-785-2482
Fax: +31(0)30 24 81 211
Fax: +49(0)89 4357 156 99
Fax: +43(0)180 11 10 82
Fax: +44(0)1925 711143
Fax: +490 99 02869488.30
Fax: +41(0)43 322-9809

Fax: +48 (0)71 734 52 10
Fax: +86 (0)21-5489 0005
Fax: +86-(0)120-3826 4223
Fax: +86-(0)20-3826 4223
Fax: +86-(0)23-6773 4799
Fax: +86-(0)23-6773 1799
Fax: +86-(0)23-6779 1873
Fax: +86-(0)27-8544 9991

Fax: +65 6560-9721

Fax: +82(0)31-995-6511

https://konicaminolta.com/instruments/network

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page :