


Specifications

	Spectrophotometer CF-300						
Illumination/ viewing system	di:8°, de:8° (diffuse illumination: 8° viewing)						
	SCI (specular component included)/SCE (specular component excluded) switchable						
	Conforms to JIS Z 8722 condition c, ISO 7724/1						
Integrating sphere size	ø152 mm						
Detector	Dual 40-element silicon photodiode arrays						
Spectral separation device	Planar diffraction grating						
Wavelength range	400 to 700 nm						
Wavelength pitch	10 nm						
Measurement range	0 to 175%; Output/display resolution: 0.01%						
Light source	High-CRI white LED						
Illumination area	MAV	ø11 mm	XUSAV	5×7 mm	NC/NC with glass (Non-contact measurement)	ø34 mm	
Measurement area		ø8 mm		0.75×1 mm		ø8 mm	0.75×1 mm
Measurement distance	Contact measurements (MAV/XUSAV target mask): 0.0 mm Non-contact measurements (NC target mask): 1.0 mm Non-contact measurement(NC target mask with glass):0.7 mm						
Measurement time	Approx. 0.1 seconds						
Minimum measurement interval	Approx. 0.2 seconds						
Repeatability	Chromaticity value: Standard deviation within E*ab 0.02 (When MAV/SCI contact measurements of a white calibration plate are taken 30 times at 1-second intervals after white calibration)						
Inter-instrument agreement	Within E*ab 0.15 (Based on MAV/SCI contact measurements of 12 BCRA Series II color tiles compared to values measured with a master body under Konica Minolta standard conditions)						
Interface	USB 2.0, RS-232C						
Power	Dedicated AC adapter (AC 100 to 240 V, 50/60 Hz)						
Operation temperature/ humidity range	15 to 30°C, relative humidity is 80% or less (at 30°C) with no condensation						
Storage temperature/ humidity range	0 to 40°C, relative humidity is 80% or less (at 35°C) with no condensation						
Size (W×H×D)	Approx. 186 × 202 × 317 mm (Including handle height: 246 mm)						
Weight	Approx. 7.3 kg						

Dimensions (Units:mm)

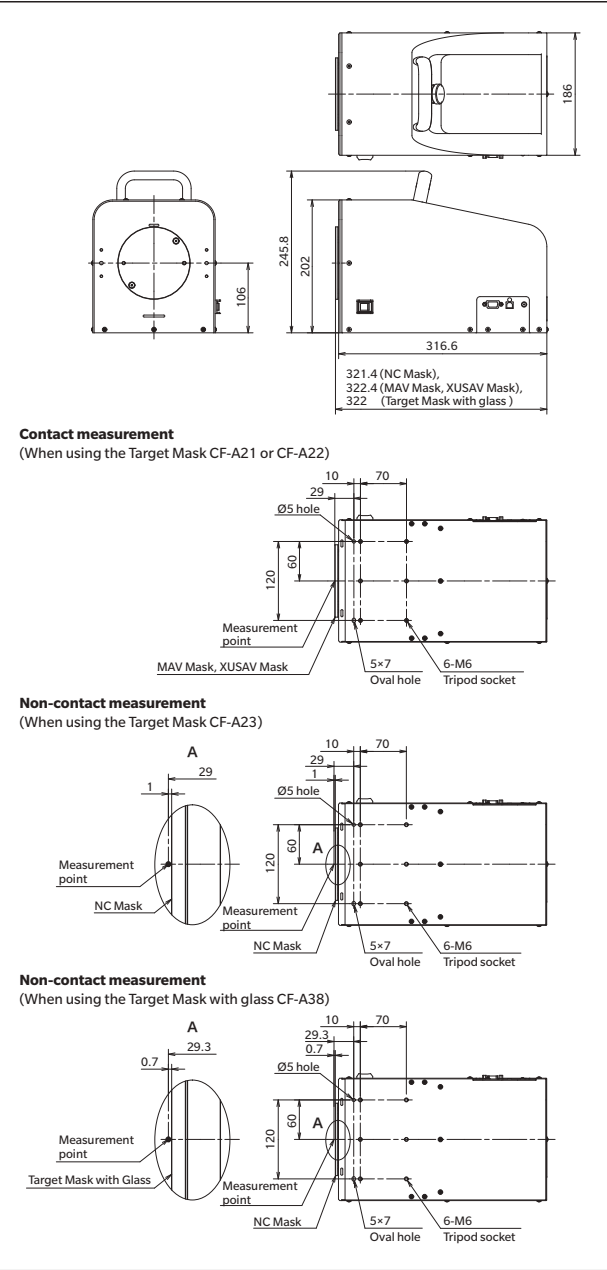

- KONICA MINOLTA, the Konica Minolta logo and symbol mark, "Giving Shape to Ideas" and SpectraMagic are registered trademarks or trademarks of Konica Minolta, Inc.
- Displays shown are for illustration purpose only.
- The specifications and appearance shown herein are subject to change without notice.

SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.

ISO Certifications of KONICA MINOLTA, Inc., Sakai Site

JQA-QMA15888
Design, development, manufacture/
manufacturing management, calibration, and
service of measuring instruments

JQA-E-80027
Design, development,
manufacture, service and sales
of measuring instruments

KONICA MINOLTA, INC.	Osaka, Japan			
Konica Minolta Sensing Americas, Inc.	New Jersey, U.S.A.	PHONE: (888)473-2656 (in USA), +1(201)236-4300 (outside USA)	FAX: +1(201)785-2480	E-Mail: service.us@konicaminolta.com
Konica Minolta Sensing Europe B.V.	European HQ/ BENELUX German Office French Office UK Office Italian Office Swiss Office Nordic Office Polish Office Turkish Office	Nieuwegein, Netherlands München, Germany Roissy CDG Cedex, France Warrington, United Kingdom Cinisello Balsamo, Italy Dietikon, Switzerland VÄSTRA FRÖLUNDA, Sweden Wrocław, Poland İstanbul, Turkey	PHONE: +31(0)30 248-1193 PHONE: +49(0)89 4357 156 0 PHONE: +33(0)1 80 11 10 70 PHONE: +44(0)1925 467300 PHONE: +39 02849488.00 PHONE: +41(0)43 322-9800 PHONE: +46(0)31 7099464 PHONE: +48(0)71 73452-11 PHONE: +90(0)216-528 56 56	E-Mail: info.benelux@seu.konicaminolta.eu E-Mail: info.germany@seu.konicaminolta.eu E-Mail: info.france@seu.konicaminolta.eu E-Mail: info.uk@seu.konicaminolta.eu E-Mail: info.italy@seu.konicaminolta.eu E-Mail: info.switzerland@seu.konicaminolta.eu E-Mail: info.nordic@seu.konicaminolta.eu E-Mail: info.poland@seu.konicaminolta.eu E-Mail: info.sensing@konicaminolta.com.tr
Konica Minolta (CHINA) Investment Ltd.	SE Sales Division Beijing Office Guangzhou Office Chongqing Office Qingdao Office Wuhan Office Shenzhen Office	Shanghai, China Beijing, China Guangzhou, China Chongqing, China Shandong, China Hubei, China Shenzhen, China	PHONE: +86-(0)21-6057-1089 PHONE: +86-(0)10-8522 1551 PHONE: +86-(0)20-3826 4220 PHONE: +86-(0)23-6773 4988 PHONE: +86-(0)532-8079 1871 PHONE: +86-(0)27-8544 9942 PHONE: +86-(0)755-2868 7535	E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com E-Mail: hcn_sensing@gcp.konicaminolta.com
Konica Minolta Sensing Singapore Pte. Ltd.	Singapore		PHONE: +65 6563-5533	E-Mail: se-service.sg@konicaminolta.com
Konica Minolta Sensing Korea Co., Ltd.	Korean HQ / Kintex Cheonan Office	Goyang-si, Korea Cheonan-si, Korea	PHONE: +82(0)2-523-9726 PHONE: +82(0)41-556-9726	FAX: +82(0)31-995-6511

Addresses and telephone/fax numbers and e-mail address are subject to change without notice.
For the latest contact information, please refer to KONICA MINOLTA Worldwide Offices web page:

<https://konicaminolta.com/instruments/network>



SPECTROPHOTOMETER CF-300

Capable of measuring small target areas

Non-contact measurement

High speed and accuracy

The Standard in Measuring Color & Light


Giving Shape to Ideas



Capable of measuring small target areas

Capable of measuring targets as small as 0.75×1 mm, the CF-300 can be used to measure the color of watch screws, small parts for smartphones and game consoles, etc.

The view pointer makes it easy to identify the measurement area, effectively reducing the likelihood of measurement errors.



<Benefits>

- Measuring colors of small target areas such as watch dial faces and bands, smartphone parts, eyeglass frames, fasteners, buttons, fountain pens, etc.



Non-contact measurement

The CF-300 employs an integrating sphere that allows colorimetric measurements to be conducted at a distance of 1 mm from the target object.

Integrating-sphere-based measurements makes the CF-300 interchangeable with general spectrophotometers.

<Benefits>

- Measuring colors of cosmetics such as lipstick or foundation, paints or other targets that could stain the instrument during contact measurements.



High-speed measurement

Requiring only about 0.1 sec per measurement and capable of continuous measurement at a minimum interval of about 0.2 sec, the CF-300 can perform 5 measurements per second*.

* For high-speed measurement use, the software must be customized to the customer's line conditions.

<Benefits>

- Improving efficiency of quality control via high-speed non-contact measurements on production lines.

Example configurations



Benchtop Base



Bottom Port Stand

System Diagram

